

DATASHEET HERADESIGN® Creative Line

HERADESIGN® Creative Line is a single layer magnesite bonded wood wool acoustic ceiling and wall panel.

- Surface design with milled V-groove pattern
- Flexible and innovative design solution with up to twelve patterns to choose from
- Available in $\ensuremath{\mathsf{HERADESIGN}}^{\ensuremath{\mathsf{\$}}}$ Fine and Superfine
- Excellent sound absorption performance



YOUR CEILING OUR SOLUTIONS

KNAUFCEILINGSOLUTIONS.COM

DATASHEET HERADESIGN® Creative Line




Surface	HERADESIGN [®] Fine, Fine A2	HERADESIGN® Superfine, Superfine A2
Edge details	Edge configuration AK-01	20
Thickness 🕂	25mm	
Dimensions	1200 x 600mm	
System	Screw-fix on wooden battens - System B2.1 Screw-fix on CD channels - System B2.2	
Weight Kg	12,6 - 19,0 kg/m²	
Fire reaction	Euroclass B-s1,d0 according EN 13501-1	
Sound absorbtion	HERADESIGN® Fine:a bis 0.90 / NRC bis 0.90HERADESIGN® Fine A2:a bis 0.75 / NRC bis 0.80HERADESIGN® Superfine:a bis 1.00 / NRC bis 1.00HERADESIGN® Superfine A2:a bis 0.95 / NRC bis 1.00	
Thermal conductivity	HERADESIGN® Fine, Superfine: λ = 0.09 W/mK according EN 12667HERADESIGN® Fine A2, Superfine A2: λ = 0.10 W/mK according EN 12667	
Humidity resistance	bis 90% RH	
Areas of application	A decorative and acoustically effective suspended ceiling and wall panel for use in interior spaces as well as roofed outdoor areas that are not directly exposed to environmental influences such as rain or pollutants.	
Installation	The installation of HERADESIGN® acoustic panels should take place during the last phase of the job, and in temperature and humidity controlled conditions. All building activities which create dust must be completed before the start of installation. Store the panels flat and protect against moisture and dirt. The packaging does not protect the products against rain. HERADESIGN® products should be installed in strict accordance with Knauf Ceiling Solutions installation and storage guidelines.	
Special information	 Manufacturing tolerances in nominal dimensions: L4, W2, T2: ± 1 mm, for lengths > 1250mm L4: ± 2mm Maximum changes in dimension in standard climate 23°C/50% relative humidity: ± 1‰ 	
Cleanability		
Colours 🤔		
Sustainability		FSC

DATASHEET HERADESIGN® Creative Line



PRODUCT RANGE

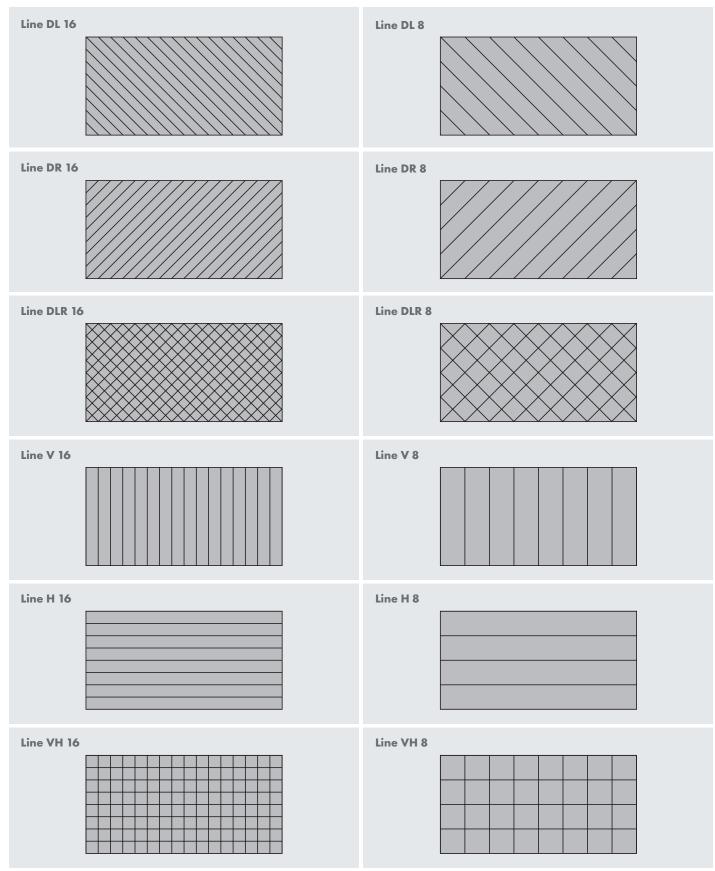

Products may vary from country to country. Please contact your local sales representative. For further information and legal notice, please visit our website.